



CREATING A CLEANER, SAFER, HEALTHIER WORLD.

EQUIPMENT



T3e / T3 / T3+

COMPACT, WALK-BEHIND FLOOR SCRUBBER

- Just scrubbed floors are immediately clean, dry and safe for foot traffic with ec-H2O™ and FaST® technologies
- Easy to clean and maintain Hygenic® solution and recovery tanks
- Compact with ergonomic controls to ensure easy maneuverability and operator comfort

DURABLE, DEPENDABLE, EASY-TO-USE SCRUBBER



Effectively clean a variety of environments while ensuring operator comfort with ergonomic controls.

EXCEPTIONALLY POWERFUL

Achieve deep cleaning results with a scrub motor that delivers up to 41 kg of powerful scrubbing pressure. Clean the harshest of environments with tough, durable, non-corroding scrub decks and squeegee frames.


EASY TO OPERATE AND MANEUVER

Clean both open and congested spaces easily with the T3e/T3/T3+ compact body design, simple to operate controls and ergonomically designed handle. All brushes and squeegees can also be changed and adjusted without tools.

ENGINEERED FOR SAFETY

Minimise the risk of slip and fall injuries with clean, dry and safe floors by scrubbing with ec-H2O™ and FaST® technologies. Achieve complete water recovery (even on 180-degree turns) and a quiet 68.5 dBA sound level for anywhere, anytime cleaning.

INSIDE THE T3

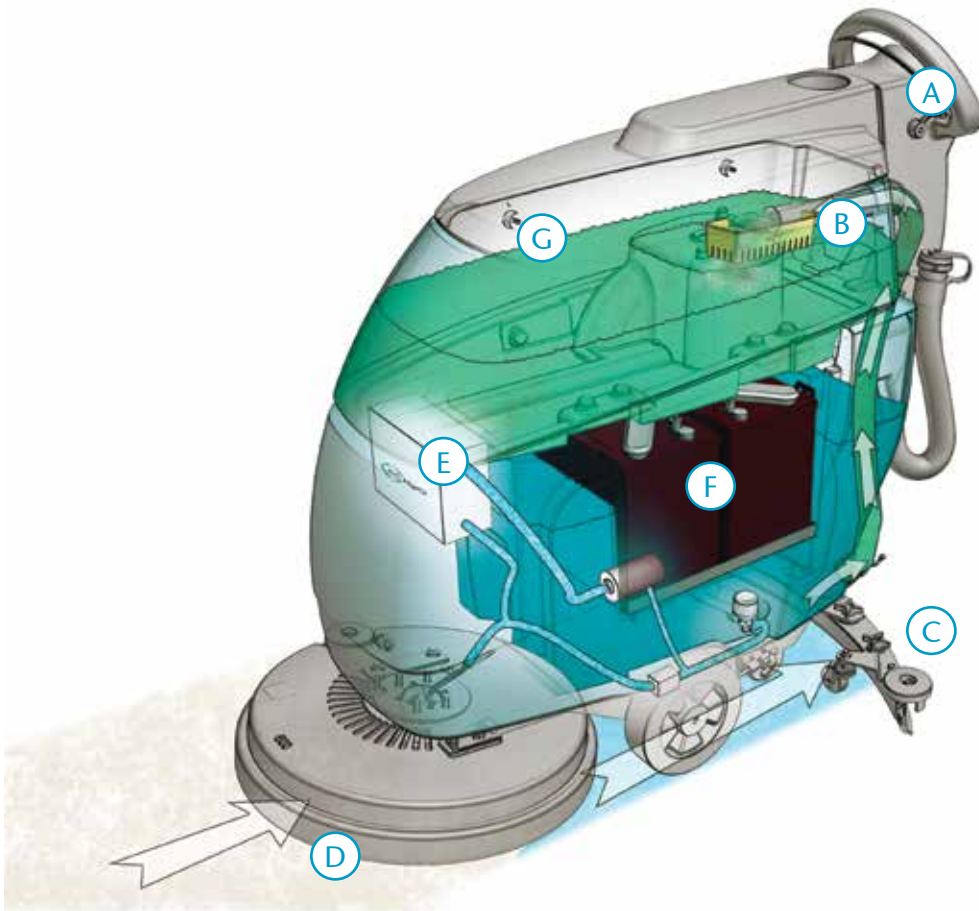

EXCLUSIVE TECHNOLOGIES

(optional cleaning innovations)

Both technologies increase scrub time by up to three times using a single tank of water.



ec-H2O™ technology electrically converts water into an innovative cleaning solution that cleans effectively, saves money, improves safety, and reduces environmental impact* compared to daily cleaning floor chemicals and methods.

* Based on a study by EcoForm™. Visit www.tennantco.com for more information.



FaST® Foam Scrubbing Technology uses up to 70% less water and 90% less chemicals to improve floor traction as certified by NFSI, helping reduce the risk of slip and fall accidents.

- A** Easily train new operators to use the simple, intuitive controls.
- B** Solution and recovery tanks are easily cleanable with the exclusive Hygenic® tanks that are fully accessible for cleaning.
- C** Quickly remove and replace brushes and squeegees. There are no tools for maintenance and the blade is factory set at the optimum recovery angle.

- D** Eliminate the need for follow-up passes and mop-ups with the fully self-adjusting splash skirt that captures scrub deck overspray.
- E** Scrub longer on a single tank with Green Seal certified FaST® Foam Scrubbing Technology or ec-H2O™ technology.
- F** Save time and storage with the on board charger.
- G** Eliminate operator contact with wastewater and prevent clogged hoses with the debris tray.



T3E / T3 / T3+ COMPACT SCRUBBER

SCRUBBING SYSTEM	T3E (PAD ASSIST)	T3	T3+
Cleaning path	500 mm	500 mm	600 mm
Productivity (per hour)			
Theoretical max	2,200 m ²	2,200 m ²	2,650 m ²
Estimated actual** (conventional)	940 m ²	1,255 m ²	-
Estimated actual** (ec-H2O™/FaST®)	1,260 m ²	1,420 m ²	1,690 m ²
BRUSH DRIVE SYSTEM			
Brush motor	746 W	746 W	650 W
Brush RPM	200 rpm	230 rpm	285 rpm
Brush/pad pressure (up to)	41 kg	41 kg	41 kg
SOLUTION DELIVERY SYSTEM			
Solution tank capacity	40 L	40 L	40 L
RECOVERY SYSTEM			
Recovery tank capacity (incl. demisting chamber)	57 L	57 L	57 L
Vacuum motor	370 W 2-stage	373 W 2-stage	370 W 2-stage
Waterlift at sealed orifice	1,020 mm	1,020 mm	1,020 mm
BATTERY SYSTEM			
System voltage 2 (12 V)	24 V	24 V	24 V
Battery amp hour	105 AH	155 AH	155 AH
Run time (continuous cleaning rating)	2.5 h	3.0 h	3.0 h
MACHINE SPECIFICATIONS			
Length	1,280 mm	1,280 mm	1,225 mm
Width (with squeegee)	760 mm	760 mm	760 mm
Height	1,090 mm	1,090 mm	1,090 mm
Weight (with batteries)	154 kg	177 kg	177 kg
Sound level	68.5 dBA	68.5 dBA	68.5 dBA

WARRANTY

See your local representative for warranty information.

**Estimated coverage rates use the practical speed and empty/fill time standards from the 2004 ISSA Cleaning Times handbook.

*Specifications subject to change without notice.

SEEING IS BELIEVING

For a demonstration or additional information,
send an email to contactus@tennantco.com

Tennant Australia

Toll Free: 1800 226 843
Ph: +61 2 8718 9718

www.tennantco.com.au
contactus@tennantco.com

Tennant New Zealand

Ph: +64 9 253 9013

www.tennantco.co.nz
contactus@tennantco.com